



## Features

- Class 1 Division 2, ATEX Zone 2, IECEx & EMC Class B Certified
- Intel® 6th Gen. Core i5 Processor
- 15" Fanless Panel PC for Wide Temp -20 ~ 60°C Environments
- LAN USB COM M16 (EX Ec) I.O. Up to 4 & Waterproof M12 USB COM (EX ic) I.S. Output
- Connector Panel for Easy Cable Installation
- Totally Sealed IP66 / NEMA 4X Enclosure
- 100% Water/Dust Proof Guarantee


## Specification

Product		WTPE-9E66-15W		
Main System	CPU	FCBGA1356 6th generation Intel® Core i5 processor (15W max.)		
	Graphic	Intel® Graphics HD 520		
	Memory	Two 2133 MHz DDR4 SODIMM Socket Support Dual Channel, non-ECC, up to 32GB		
	OS Support (Optional)	Win10 Embedded 64-bit / Windows 10 Professional 64-bit		
Display	Size	15" 4:3		
	Resolution (pixel)	1024 x 768 (XGA)		
	Number of Colors	16.7M colors (RGB 6-bit + Hi FRC )		
	View Angle (H/V)	160(H) / 160(V)		
	Brightness (nits)	450 nits		
	Contrast Ratio	600 : 1 (Typ)		
Touch Panel	Type	Full Flat Resistive Touch Panel		
	Light Transmission	80 ± 5%		
	Hardness / Lifetime	4H / 490,000 hours		
Storage & Expansion	Storage	2.5" SATA SSD		
	Expansion	Mini PCIe x 1 M.2 Type E x 1		
I/O Ports/ Power	<b>Configuration</b>	<b>A</b>	<b>B/C*</b>	<b>D</b>
	<b>Swappable M12, 8pin (I.S. Output, Support EX ic, Extension Cable to Ex ic Devices)</b>	COM X 2 for RS232	USB2.0 X 1 COM X 1 for RS232	USB2.0 X 2
	<b>Cable Gland M16 (Max. Output x 4, Must be Installed by User)</b>	USB 2.0 X 2 (EX ec) LAN X 2 (EX ec, i219LM for Vpro) COM X 1 for RS232/422/485 (EX ec) Optional Mini-PCIe Module for Cable Connection X 1 (EX ec)		
	Power Adapter	100W with 24V DC output, with 1.2M cable, PSE		
	Power / Consumption	DC 24V Input, M16 (EX ec, Must Be Installed by User) / 46.7 Watts		
Environmental	Temperature	Operating Temperature -20 ~ 60 °C, without freezing (IEC60068-2-56, air flow cooling) Storage Temperature -20 ~ 60°C		
	Humidity	Operating & Storage: -10 ~ 90%, non-condensing		
	Water/Dust resistance	IP66 / NEMA4X		
Mechanical Characteristics	Housing	Stainless Steel (SUS304), Chassis Type		
	Dimensions (Net: mm)	435 x 350 x 84		
	Weights (Net: kg))	11kg		
	Mounting	VESA (100x100 mm x mm), side mount (M6*2)		
Certification	EMC: FCC, CE (EMC), VCCI Class B, Canada ICES-003, Safety: IEC-62368 CCC, IECEx, Class 1 Division 2 Group A, B, C, D T5 (Config. A Ready, B/C, D Compliance) ATEX Zone2 EX II 3G Ex ic ec IIC T4 Gc IP66, TS Mark (Taiwan) Ex ic ec			

\*Remark: Configuration B/C is defined/verified as different interface combination connected in certificate report.

# WTPE-9E66-15W

# Explosion Proof Panel PC

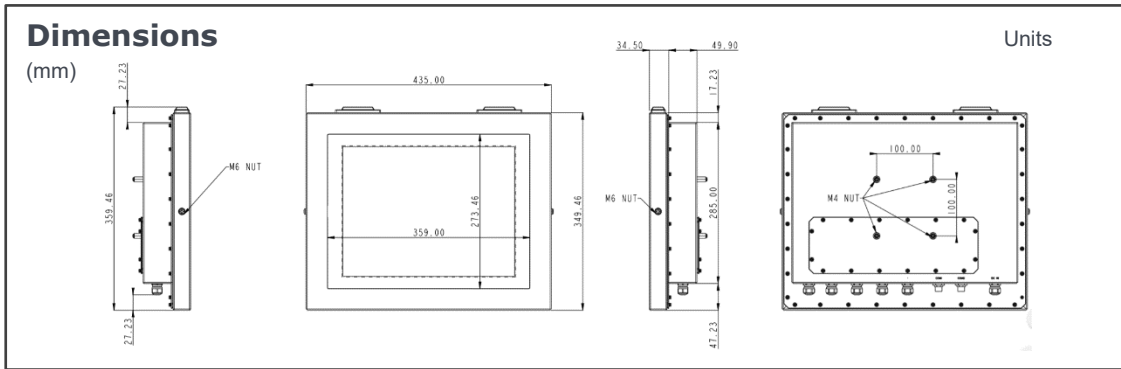


Major Options	
Options	① Wifi、IEEE802.11ac/b/g/n, Bluetooth Class1.0、2.0 (included in explosion proof certification, not co-existed with other mini-PCle module)
Accessory	① COM extension cable kit through M16 cable gland (2 meter length, external 9pin male type) (cable kit must be installed by user) ② USB2.0 extension cable through M16 cable gland (2 meter length, external female type A) (cable kit must be installed by user) ③ LAN extension cable through M16 cable gland (2 meter length, external female RJ45 type) (cable kit must be installed by user) ④ Swappable M12 COM extension cable (2 meter length, M12 to PPC, external 9pin male type) (for configuration A,B/C) ⑤ Swappable M12 USB2.0 port extension cable (0.3 meter length, M12 to PPC, external female type A connectors) (for configuration B/C, D) ⑥ Swappable M12 DC power extension cable (1.2 meter length, M12, stripped and tinned wires on opposite end to DC 24V output power supply)
Customization	① Kit to support over 100 meter power supply length, ② Power on/off switch ③ EtherNet/ IP (Industrial Protocol) Interface (temperature code condition is T4, not co-existed with other mini-PCle module) ④ PROFIBUS DP (process field bus decentralized peripherals)-slave Network Interface (temperature code condition is T4, not co-existed with other mini-PCle module) ⑤ DeviceNet-slave Interface (temperature code condition is T4, not co-existed with other mini-PCle module) ⑥ CC-Link (control & communication link)-slave interface (temperature code condition is T4, not co-existed with other mini-PCle module) ⑦ Panel mounting by bezel kit (not co-exist with wireless function) ⑧ 50 meter DC cable to support 50 meter power length ⑨ 100 meter DC cable to support 100 meter power length ⑩ Wall mount/ Table mount bracket

## Order Information

Item	Cooling	Description
WTPE-9E66-15W	Fanless	15" Core i5-6200U / DDR4 4G RAM/ 128G SSD/ Full Flat R-touch


## Configuration A,D

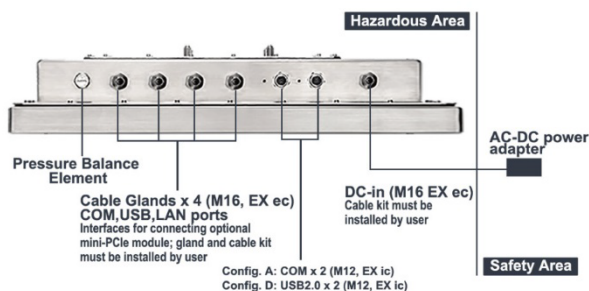

Entity parameters A	
COM1:	Uo = 10.0 V, Io = 38.9 mA, Po = 389 mW, Co = 2.8µF, Lo = 52.867 mH
COM2:	Uo = 9.0 V, Io = 31.6 mA, Po = 284 mW, Co = 0.3µF, Lo = 80.115 mH

Entity parameters D	
USB:	Uo = 5.5 V, Io = 151.2 mA, Po = 0.8316 W, Co = 1000µF, Lo = 3.499 mH

## Configuration B/C

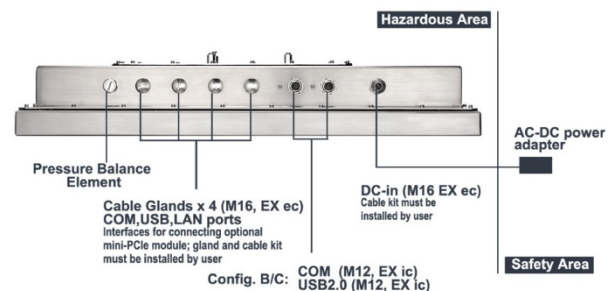

Entity parameters B/C	
COM:	Uo = 9.0 V, Io = 31.6 mA, Po = 284 mW, Co = 0.3 µF, Lo = 80.115 mH
USB:	Uo = 5.5 V, Io = 151.2 mA, Po = 0.8316 W, Co = 1000 µF, Lo = 3.499 mH